
TECHNICAL SPECIFICATION

Boma Electrically Powered Off Road Wheelchair





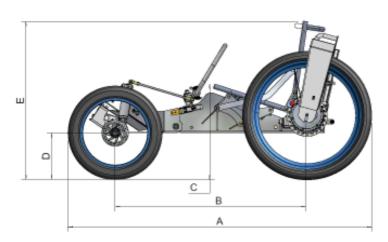

MEASUREMENT AND PERFORMANCE

STANDARD FEATURES

| TOTAL LENGTH (A) | 1645mm |
|------------------------|--------|
| WHEEL BASE (B) | |
| SEAT BASE HEIGHT (C) | |
| GROUND CLEARENCE (D). | |
| TOTAL HEIGHT (E) | |
| TOTAL WIDTH (F) | |
| WHEEL TRACK (G) | |
| SEAT WIDTH (H) | |
| WEIGHT INCL BATTERIES. | |
| CHARGING TIME | _ |
| RANGE | |
| TOP SPEED | |
| MAX USER WEIGHT | |
| SEAT WIDTH | |
| SEAT DEPTH | |

- FULL INDEPENDENT ADJUSTABLE SUPSENSION
- FRONT HYDRUALIC DISC BRAKES
- ♦ REAR DISC BRAKES
- ◆ LIGHTWEIGHT FRAME
- ♦ 26x3" OFF ROAD REAR TYRES
- ♦ 20x2" OFF ROAD FRONT TYRES
- ♦ 2 x 36V HIGH TORQUE MOTORS
- ♦ 2 x 36V NIMH BATTERIES
- 240V CHARGER
- HIGH STRENGTH RIMS AND SPOKES













1. Seat back and handlebars collapse. 2. Rear wheel carriers are removed. 3. Front wheels are removed. 4. Frame splits

MOLTEN ROCK EQUIPMENT LTD Unit 2 Rook Tree Farm, Hulcote, Milton Keynes MK17 8BW T: + 44 (0) 1908 586447 E: Sales@moltenrock.co.uk W: www.moltenrock.co.uk

C E Directive No. 93/42/EEC

Registered in England & Wales No.5114940

VAT Reg No. GB 871857287

